

Compact Time-Of-Flight Laser Sensor

TOF-DL Series

Object Detection in Long Distance

- IO-Link connection supported
- Measurement range: 0.25 to 2.5m
- The smallest TOF sensor in class
- Built-in digital display for simple setup

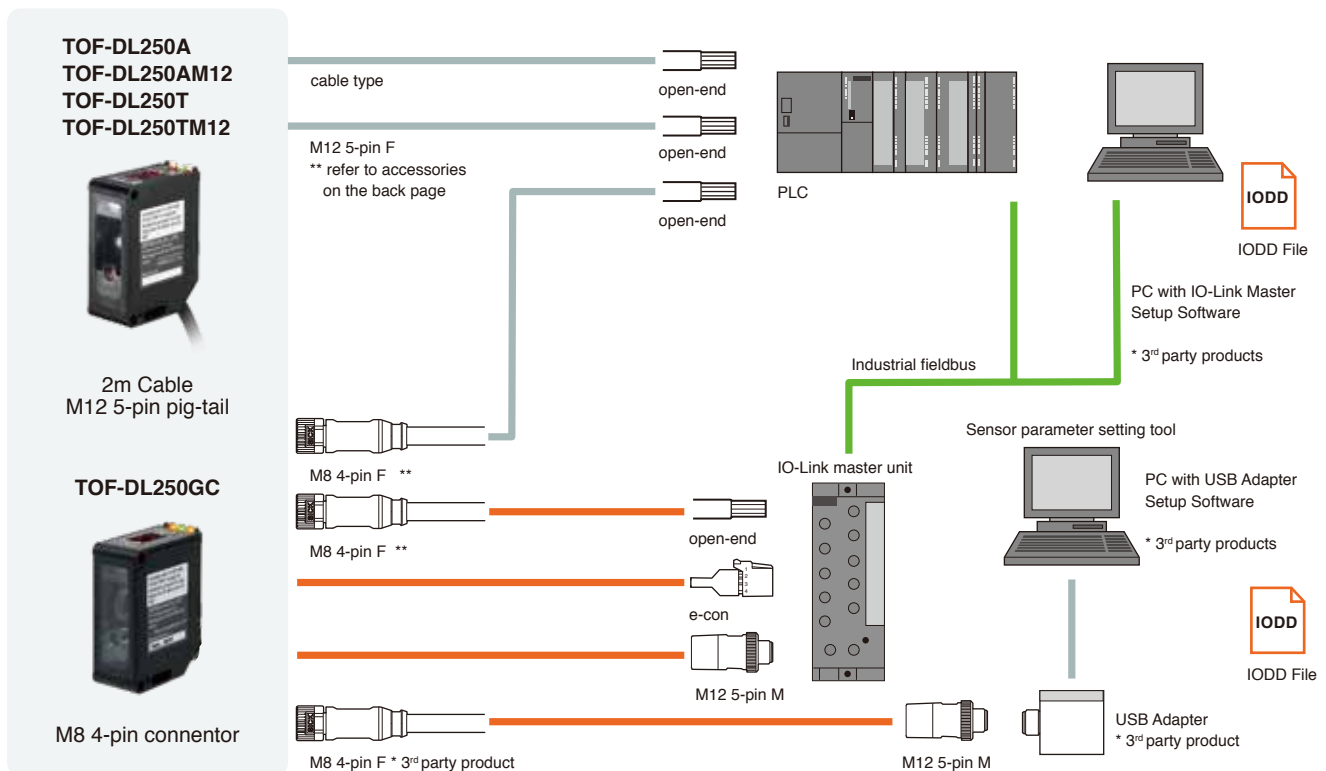


Photo: Cable type

Lineup

| Type | Measurement range | Laser class (IEC/FDA) | IO-Link | I/O | Connection type | Model |
|------|-------------------|-----------------------|---------|---|-----------------|------------------------|
| TOF | | Class 1 | ✓ | Control output x2 (External input) | M8 connector | NEW TOF-DL250GC |
| | | | — | Analogue output Control output External input | Cable | TOF-DL250A |
| | | | — | Control output x3 (External input) | M12 pig-tail | TOF-DL250AM12 |
| | | | — | | Cable | TOF-DL250T |
| — | M12 pig-tail | TOF-DL250TM12 | | | | |

System structure



Specifications

| Type | Analog output type | | Three-output type | IO-Link type |
|---|------------------------------|--|------------------------------------|--|
| Model | Cable type | TOF-DL250A | TOF-DL250T | - |
| | M12 Pig-tail type | TOF-DL250AM12 | TOF-DL250TM12 | - |
| | M8 connector type | - | - | TOF-DL250GC |
| Measurement range *1 | | 0.25 to 2.5 m | | |
| Light source | Medium/Wavelength | Red semiconductor laser, 650 nm | | |
| | Average output | 390 μW or less | | |
| Laser class | | Class 1 (IEC/JIS/FDA *2) | | |
| Spot size *3 | | φ10 mm (At a distance of 2.5 m) | | |
| Sampling period / Response time | | 0.2 ms / 0.5 ms or less (When performing moving average once) | | |
| Hysteresis | | 3% or less (Moving average: 64 times/256 times, Distance: 1 to 2.5 m) | | |
| Sensitivity adjustment | | Teaching + Manual adjustment | | |
| Indicators | | Output, Stability/Laser OFF | Output 1 to 3, Stability/Laser OFF | Detection 1 and 2 Power/IO-Link |
| Digital display | | 7-segment, 3-digit LED display (Display unit: cm) | | |
| External input | | Selectable by setting | | |
| Control output | No. of outputs | 1 | 3 | 2 |
| | Type | NPN/PNP open collector | | NPN/PNP, Push/Pull |
| | Max. current, Residual volt. | Max. 100 mA/30 VDC, 1.8 V Max. | | |
| | Stability output | Output 1 switchable to stability output | | |
| | Output mode | Light ON / Dark ON selectable | | Invertable |
| Analog output, IO-Link | | 4 to 20 mA (<300 Ω) or 0 to 10 V (<100 Ω), selectable | - | Ver. 1.1, COM 3 (230.4 kbps), P-data length: 4 byte, Min. cycle time: 1.0 ms |
| Supply voltage (Including 10% ripple (p-p)) | | 12 to 30 VDC *4 | 10 to 30 VDC | IO-Link: 18 to 30 VDC SIO: 10 to 30 VDC |
| Current consumption | | 60 mA or less *5 | | |
| Applicable regulations | EMC | EMC directive (2014/30/EU) | | |
| | RoHS | RoHS directive (2011/65/EU), China RoHS (Directive 32) | | |
| | Safety | FDA regulations (21 CFR 1040.10 and 1040.11*6) | | |
| Applicable standards | UL / cUL | cURus Recognized | cULus Listed | |
| | EN | EN 60947-5-7/IEC 60825-1 | EN 60947-5-2/IEC 60825-1 | |
| Ambient temperature/humidity | | -10 to +50°C (No freezing) / 35 to 85% RH (No condensation) | | |
| Ambient illuminance | | Sunlight: 4,000 lx or less, Fluorescent lamp: 3,000 lx or less | | |
| Vibration resistance | | 10 to 55 Hz, double amplitude 1.5 mm, 2 hours in each of the XY and Z directions | | |
| Shock resistance | | 500 m/s ² (Approx. 50 G), 3 times in each of the XY and Z directions | | |
| Protection category | | IP67 | | |
| Material | | Housing: PC, Front cover: PMMA | | |
| Weight | | Cable: 88 g, Pig-tail: 48 g | 30 g | |
| Included accessories | | Mounting bracket: BEF-WK-190, Mounting screws (M3 × 20 mm) | | |

*1. For black paper (6% reflectance), gray paper (18% reflectance), and white paper (90% reflectance).

*2. In accordance with the FDA provisions of Laser Notice No. 50, the laser is classified as Class 1 per the IEC 60825-1:2007 and 2014 standards.

*3. Defined with 1/e² (13.5%) of the center strength at the maximum detection distance. The sensor may be affected by light leakage at spot sizes other than the default and when there is a highly reflective object close to the detection area.

*4. Use a power supply voltage of 12.0 VDC or higher to obtain normal output.

*5. Not including control output load current. *6. Excluding differences per Laser Notice No. 50.

Wiring & pin assignments

M12 pig-tail type

Analog output type

| Pin | Wire | Connection |
|-----|-------|----------------|
| ① | Brown | 12 to 30 VDC |
| ② | White | Analog output |
| ③ | Blue | 0 V |
| ④ | Black | Output |
| ⑤ | Gray | External input |

Three-output type

| Pin | Wire | Connection |
|-----|-------|-------------------------|
| ① | Brown | 10 to 30 VDC |
| ② | White | Output 2 |
| ③ | Blue | 0 V |
| ④ | Black | Output 1 |
| ⑤ | Gray | External input/output 3 |

M8 connector type pin


IO-Link type

| Pin | Wire | Connection |
|-----|-------|-------------------------|
| ① | Brown | 10 to 30 VDC |
| ② | White | Output 2/External input |
| ③ | Blue | 0 V |
| ④ | Black | Output 1/IO-Link |


M12 pig-tail pin No.



M8 connector pin No.



Dimensions

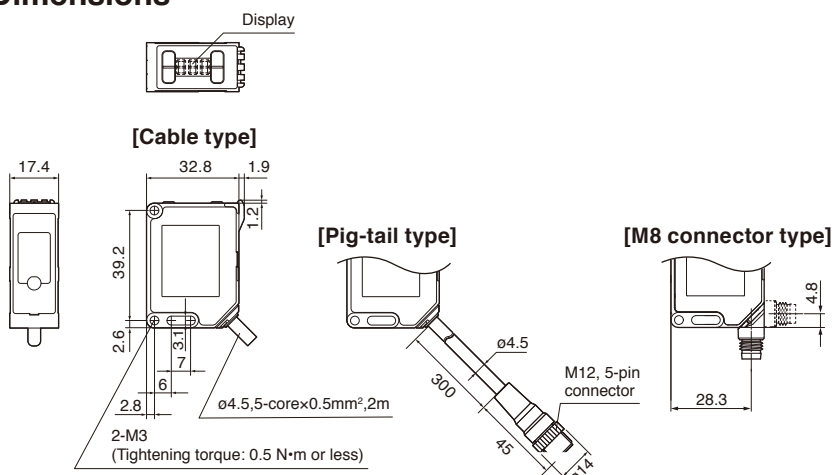

Never use these products as sensing devices for personnel protection. Doing so could lead to serious injury or death. Before use please read an instruction manual.

• Specifications are subject to change without prior notice.

Accessories

| M12 5-pin open-end cables | | |
|---------------------------|-----|--------------------|
| Straight | 2m | YF2A15-020VB5XLEAX |
| | 5m | YF2A15-050VB5XLEAX |
| | 10m | YF2A15-100VB5XLEAX |
| M8 4-pin open-end cables | | |
| Straight | 2m | M84CN-2S |
| | 5m | M84CN-5S |
| | 10m | M84CN-10S |
| L-shaped | 2m | M84CN-2L |
| | 5m | M84CN-5L |
| | 10m | M84CN-10L |



OPTEX
FA

OPTEX FA CO., LTD.

91 Chudoji-Awata-cho Shimogyo-ku Kyoto 600-8815 JAPAN

TEL. +81-(0)75-325-1314 FAX. +81-(0)75-325-2936

<https://www.optex-fa.com>

Catalog content accurate as of August 2019.

78029-00-006-1908