


Reference (typical)




Photoelectric Sensor

Z / BGS-Z series

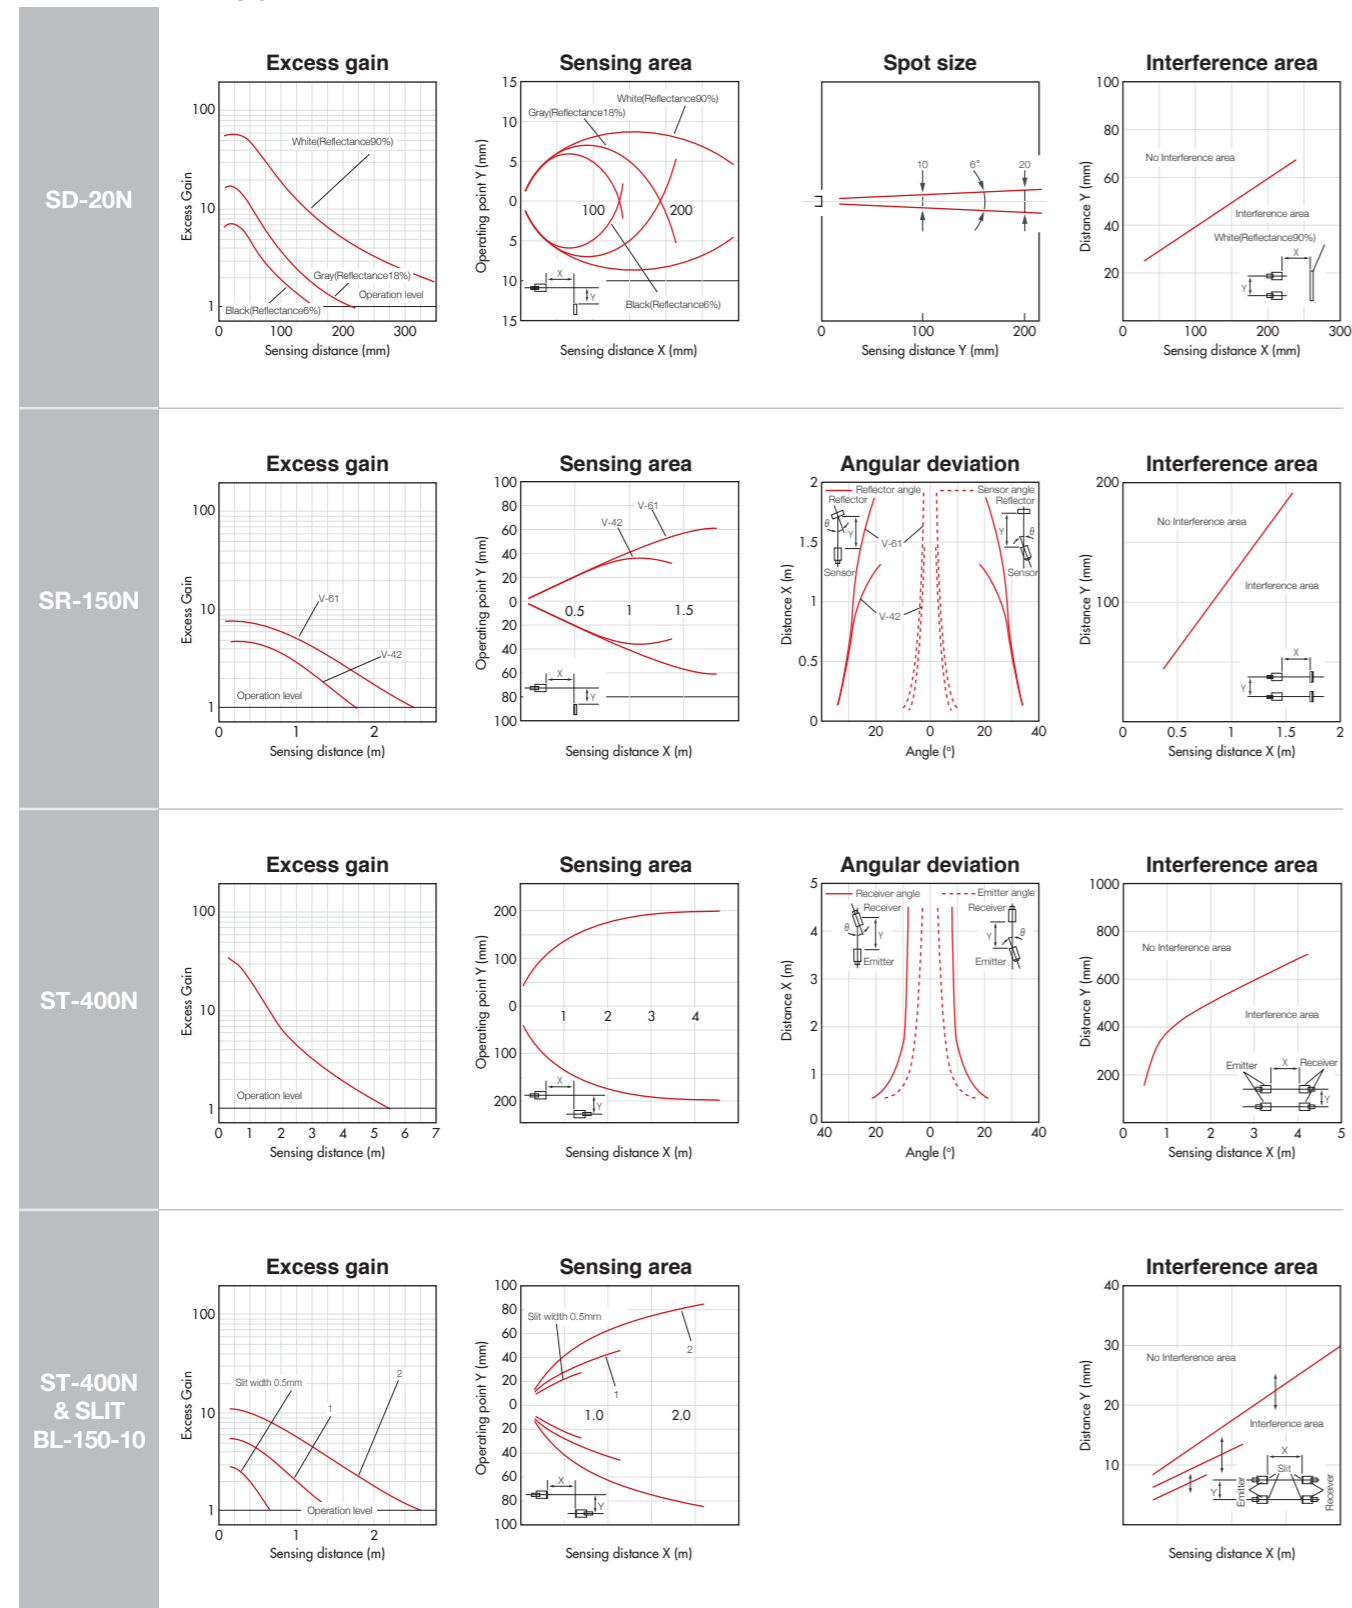


- High Performance, Low Cost! All models offer cost and space savings.
 - ZR-Q series. Ideal for detection of transparent objects! Plastic bottles, film, etc.
 - ZR-X/QX series, Coaxial beam. Sensing through narrow opening is possible!
 - BGS-Z series. High performance in small package!!
- Tough sensor! 100G shock resistance and IP67 ratings.


Applications



For material handling (ZR-350)



Beverage industry (ZR-QX200)




Car on the production line (ZT-1200)




PCB (BGS-Z10N)

Thru-Beam type

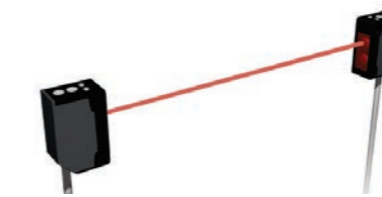


ZT-1200N / ZT-1200P
ZT-1200CN / ZT-1200CP

Convergent type




ZD-L09N / ZD-L09P
ZD-L09CN / ZD-L09CP

Retro Reflective type

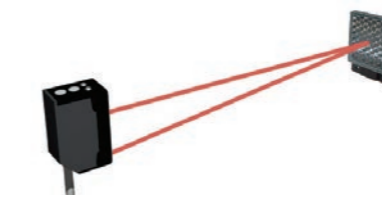

ZR-350N / ZR-350P
ZR-350CN / ZR-350CP


Diffuse type (incl. divergent type)

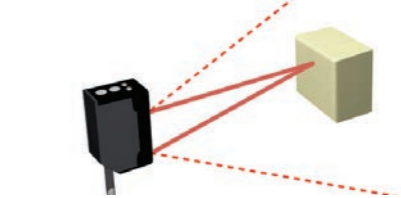

Diffuse
ZD-70N / ZD-70P
ZD-70CN / ZD-70CP


Divergent
ZD-W20N / ZD-W20P
ZD-W20CN / ZD-W20CP

BGS type

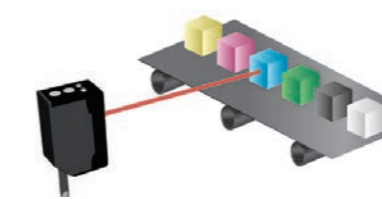

BGS-Z30N / BGS-Z30P
BGS-Z30CN / BGS-Z30CP
BGS-Z10N / BGS-Z10P
BGS-Z10CN / BGS-Z10CP

Coaxial LED type

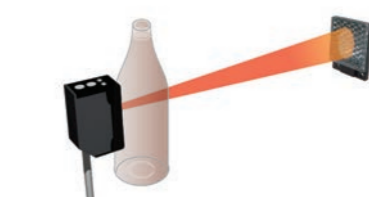

General use
ZR-X250N / ZR-X250P
ZR-X250CN / ZR-X250CP

Transparent objects
ZR-QX200N / ZR-QX200P
ZR-QX200CN / ZR-QX200CP


General Purpose

- **100G shock resistance, IP67 ratings. Tough sensor !**
- **ZR-Q series, ideal for detection of PET bottles, transparent objects, etc.**
- **Standard models for cost saving.**

Features

500μsec response

Good for fast moving objects.




Cross-talk prevention

With built-in cross-talk prevention, it is possible to mount two sensors side-by-side without mutual interference. (Use part number BL-100-POLF for thru-beam type sensors.)



ZD-W20 wide angle applications

The Divergent type ZD-W20 provides a wide angle beam that can be used to detect transparent film by collecting the reflected light from the material surface.




IP67 rating

Hose it down! Water-tightness is tested to IP67.



Rugged 100G shock rating

Rigid design for high resistance to mechanical shock



Threaded mounting holes

Prevents sensor from being damaged when it's mounted.



Specifications

Model	Thru-beam	Polarized Retro-reflective	Diffuse-reflective	Convergent	Divergent	Glass detection
Cable type	NPN ZT-1200N PNP ZT-1200P	ZR-350N ZR-350P	ZD-70N ZD-70P	ZD-L09N ZD-L09P	ZD-W20N ZD-W20P	ZR-Q200N ZR-Q200P
M8 Connector type	NPN ZT-1200CN PNP ZT-1200CP	ZR-350CN ZR-350CP	ZD-70CN ZD-70CP	ZD-L09CN ZD-L09CP	ZD-W20CN ZD-W20CP	ZR-Q200CN ZR-Q200CP
Sensing distance	12 m	3.5m (V-61 reflector)	70cm	1-9 cm	1-200 mm	2 m (V-61 reflector)
Response time	0.5 msec					
Spot size	1.5m @ 12 meter	350mm @ 3.5 meter	100mm @ 700mm	12mm @ 90mm	30mm @ 50mm	300mm @ 2 meter
Operating mode	Light On/Dark On selectable					
Hysteresis	NIL		20% Max	10% Max	20% Max	NIL
Light source	Red LED					
Sensitivity adjustment	1-turn trimmer (240 degree)					
Control output	NPN or PNP Open collector, 100mA Max / 30V DC					
Supply voltage	DC 10 - 30V incl. 10% ripple					
Power consumption	20mA Max					
LED Indicator	Dual Indicator (Output : orange, Stable : green)					
Protection category	IP67					
Shock resistance	100G (1,000m/S ²)					
Environmental illuminance	Sunlight : 10,000 lux Max., Incandescent lamp : 3,000 lux max.					
Operating temp/humidity	-25 to 55°C / 35 to 85%RH					
Materials	ABS with glass fiber (Case), PMMA (Lens)					

Retro-Reflective with Coaxial LED


The best for transparent Plastic / Glass detection

- **Coaxial LED source gives extremely tight alignment to the target.**
- **Alignment of sensor is easy thanks to bright projected LED spot.**
- **250 μsec fast response (ZR-X, coaxial beam type)**
- **World's standard model ZR-Q (general type) and ZR-QX (coaxial beam type) for Plastic and Glass applications.**

Features

Zero dead area!


The sensor has no dead area in the sensing field. This makes it ideal for use on conveyors where the position of the target changes.

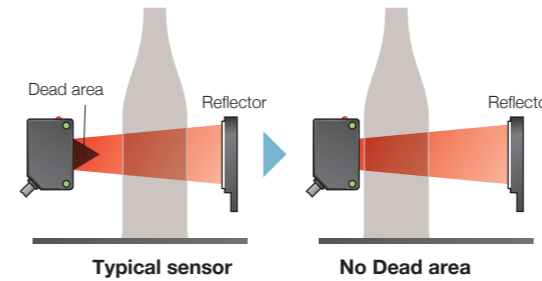

Good selection of sensors for various types of bottles.


Glass and plastic bottles come in various shapes / sizes and with many different contours which require testing in the field to determine the best sensor for the application.

The Z series is offered with both Co-axial and Conventional LED light sources to provide a solution for the detection of any bottle type.



Repeat Accuracy


Very tight Repeat Accuracy, 0.2 - 0.3mm for BGS type. Even Thru-beam and Retro types have 0.3mm Repeat Accuracy(*).



*=Tested at the middle point of sensing range.

Coaxial LED

Coaxial LED light source provides extremely tight alignment to the target, Alignment of sensor is very easy thanks to bright projected LED spot.



Specifications

Model	Retro Reflective for Transparent				Polarized Retro-reflective (Coaxial Beam)	
	General Use		Coaxial Beam			
	2m Cable	M8QD 4pin	2m Cable	M8QD 4pin	2m Cable	M8QD 4pin
Type	NPN ZR-Q200N PNP ZR-Q200P	ZR-Q200CN ZR-Q200CP	ZR-QX200N ZR-QX200P	ZR-QX200CN4 ZR-QX200CP4	ZR-X250N ZR-X250P	ZR-X250CN4 ZR-X250CP4
Sensing distance	0.01 - 2 meter (V-61 reflector)		0 - 2 meter (P250F reflector)		0 - 2.5 meter (V-61 reflector)	
Response time	0.5 msec				250μs	
Spot size	φ300mm / at 2m		φ60mm / at 2m		φ60mm / at 2m	
Operating mode	Light On / Dark On selectable					
LED Indicator	Output : orange, Stable : green		Output : orange		Output : orange, Stable : green	
Light source	Red LED					
Sensitivity adjustment	1-turn pot.					
Control output	NPN or PNP open collector, 100mA max / DC30V					
Supply voltage	DC 10 - 30V, including 10% ripple					
Power consumption	20mA max					
Protection category	IP 67					
Shock resistance	100G (1,000m/S ²)					
Environmental illuminance	Sunlight : 10,000 lux max., Incandescent lamp : 3,000 lux max					
Operating temp/humidity	-25 to 55°C/ 35 to 85% RH					
Materials	ABS(Case), PMMA(Lens)					

"M8-QD in 3 pins for European machines " are available with extension code of -CN(P)3, for instance, "ZR-QX200CN3".

BGS - LED Type


General purpose applications

- **BGS (Background Suppression Type) Sensors are not influenced by the background, available with conventional LED light source.**

Features


500μsec response

Good for fast moving objects.




Large projected spot size

The LED version of the BGS sensors projects a large 6 mm spot that will not be affected by small holes in a PC board. For PC boards that may have larger holes, the BGS-Z30 has an 18 mm projected spot size.




High power narrow beam LED

LED beam spot can be seen easily even in bright environment that helps installation.



4 Turn adjustment pot.

A four turn adjustment pot. is built-in for precise adjustment of the sensing distance. The potentiometer has a slip clutch that protects it from damage when it is turned past the end.



Specifications


Model	long distance		short distance	
	2m Cable	M8QD 4pin	2m Cable	M8QD 4pin
Type	NPN BGS-Z30N	BGS-Z30CN	BGS-Z10N	BGS-Z10CN
	PNP BGS-Z30P	BGS-Z30CP	BGS-Z10P	BGS-Z10CP
Adjustable distance	50 - 300 mm (*1)		20 - 100 mm (*1)	
Sensing distance	10 - 300 mm (*1)		5 - 100 mm (*1)	
Response time	500μs			
Spot size	φ30mm / 300mm		φ10mm / 100mm	
Hysteresis (white to white)	5%			
Operation mode	Light On / Dark On selectable			
LED Indicator	Output : orange, Stable : green			
Light source	Red LED			
Sensitivity adjustment	4-turn, endless pot.			
Control output	NPN or PNP open collector, 100mA max / DC30V			
Supply voltage	DC 10 - 30V, including 10% ripple			
Power consumption	30mA max			
Protection category	IP 67			
Shock resistance	100G (1,000m/S ²)			
Environmental illuminance	Sunlight : 10,000 lux max., Incandescent lamp : 3,000 lux max			
Ambient temp / humidity	-25 to 55°C / 35 to 85% RH			
Materials	ABS(Case), PMMA(Lens)			

*M8-QD in 3 pins for European machines" are available with extension code of -CN(P)3, for instance, "ZR-QX200CN3".


*1 white paper 100 X 100mm

Circuit diagram


NPN output

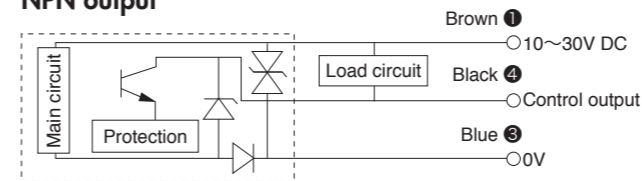

PNP output

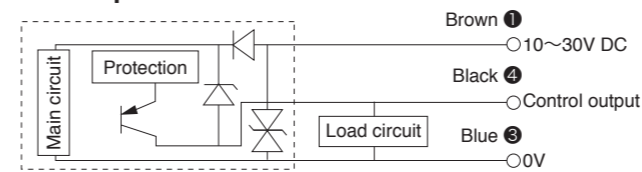


Emitter of Thru-beam type

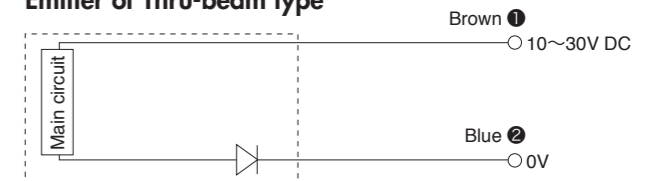


Dimensions



General Use Type except BGS



Remark : ZR-QX type (coaxial beam for transparent detection) has single LED (orange for output indicator).

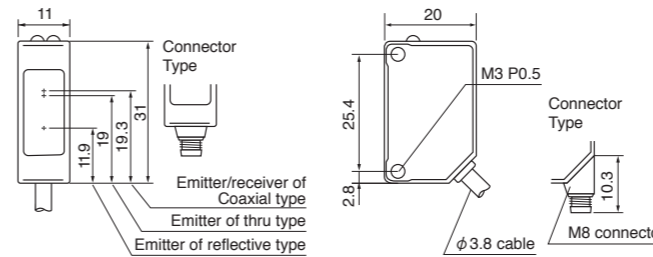


BGS Type

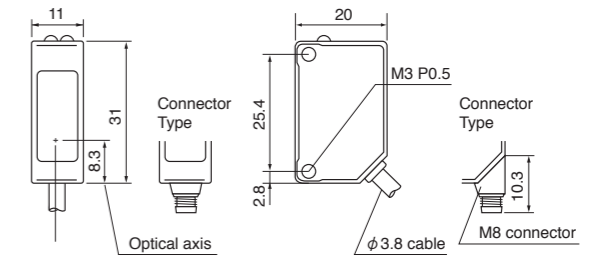


<Cable>

- Brown : DC10~30V
 - Blue : GND
 - Black : Control Output
 - Gray : Laser OFF (Laser type only)
- (NPN connect to GND / PNP connect to DC10~30V)

<3 Pin configuration>




<4 Pin configuration>




Standard bracket BEF-W100-A

Accessory for M8 QD type sensors




Standard bracket BEF-W100-B

Accessory for cabled type sensors

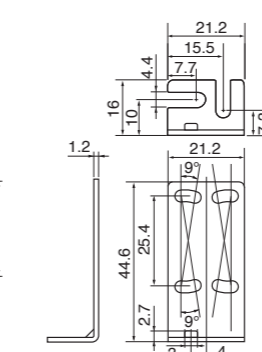


Slit mask BL-160-SK (for Thru-beam type)



Type	Size	Attached to	Object size (Min)	Scanning range
Slit a	0.5mm	Receiver, Emitter	0.4mm	0.8mm
Slit b	1mm	Receiver, Emitter	0.6mm	2.5mm
Slit c	2mm	Receiver, Emitter	1.5mm	5mm


Metal (SUS) Slit mask BL-100-M1 (for Thru-Beam Type)

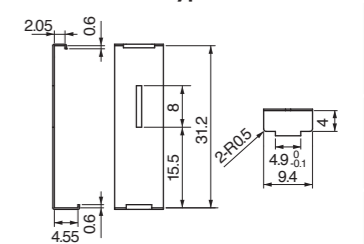


(Unit : mm)

Reflectors for LED Type


Standard reflector V-61 (Standard, LED type)

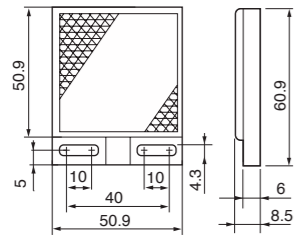

Small reflector V-42 (Optional, LED type)




Tiny reflector P45A (Optional, LED type)




Reflectors for Coaxial LED Type


P250F (Standard, ZR-QX200)



PL20F (Optional)



PL10F (Optional)



Detection distance by reflectors

ZR-QX	P250F	PL20F	PL10F
	4.0	2.8	1.0

(Unit : meter)

Options

Standard reflector V-61 (Except ZR-QX200)



P250F (ZR-QX200, standard)



JCN-S : M8 Straight type



JCN-S : 2 meter
JCN-SS : 5 meter
JCN-10S : 10 meter

Small reflector V-42



PL20F (Optional)



JCN-L : L-shape M8 type



JCN-L : 2 meter
JCN-5L : 5 meter
JCN-10L : 10 meter

Tiny reflector P45A



PL10F (Optional)



Protective mounting brackets LK-S01 LK-S02






BL-100-POLF: Cross-talk prevention filter for ZT-1200





Reference (typical)





ZT-1200





ZT-1200 & SLIT




ZR-350



ZD-20W




Reference (typical)

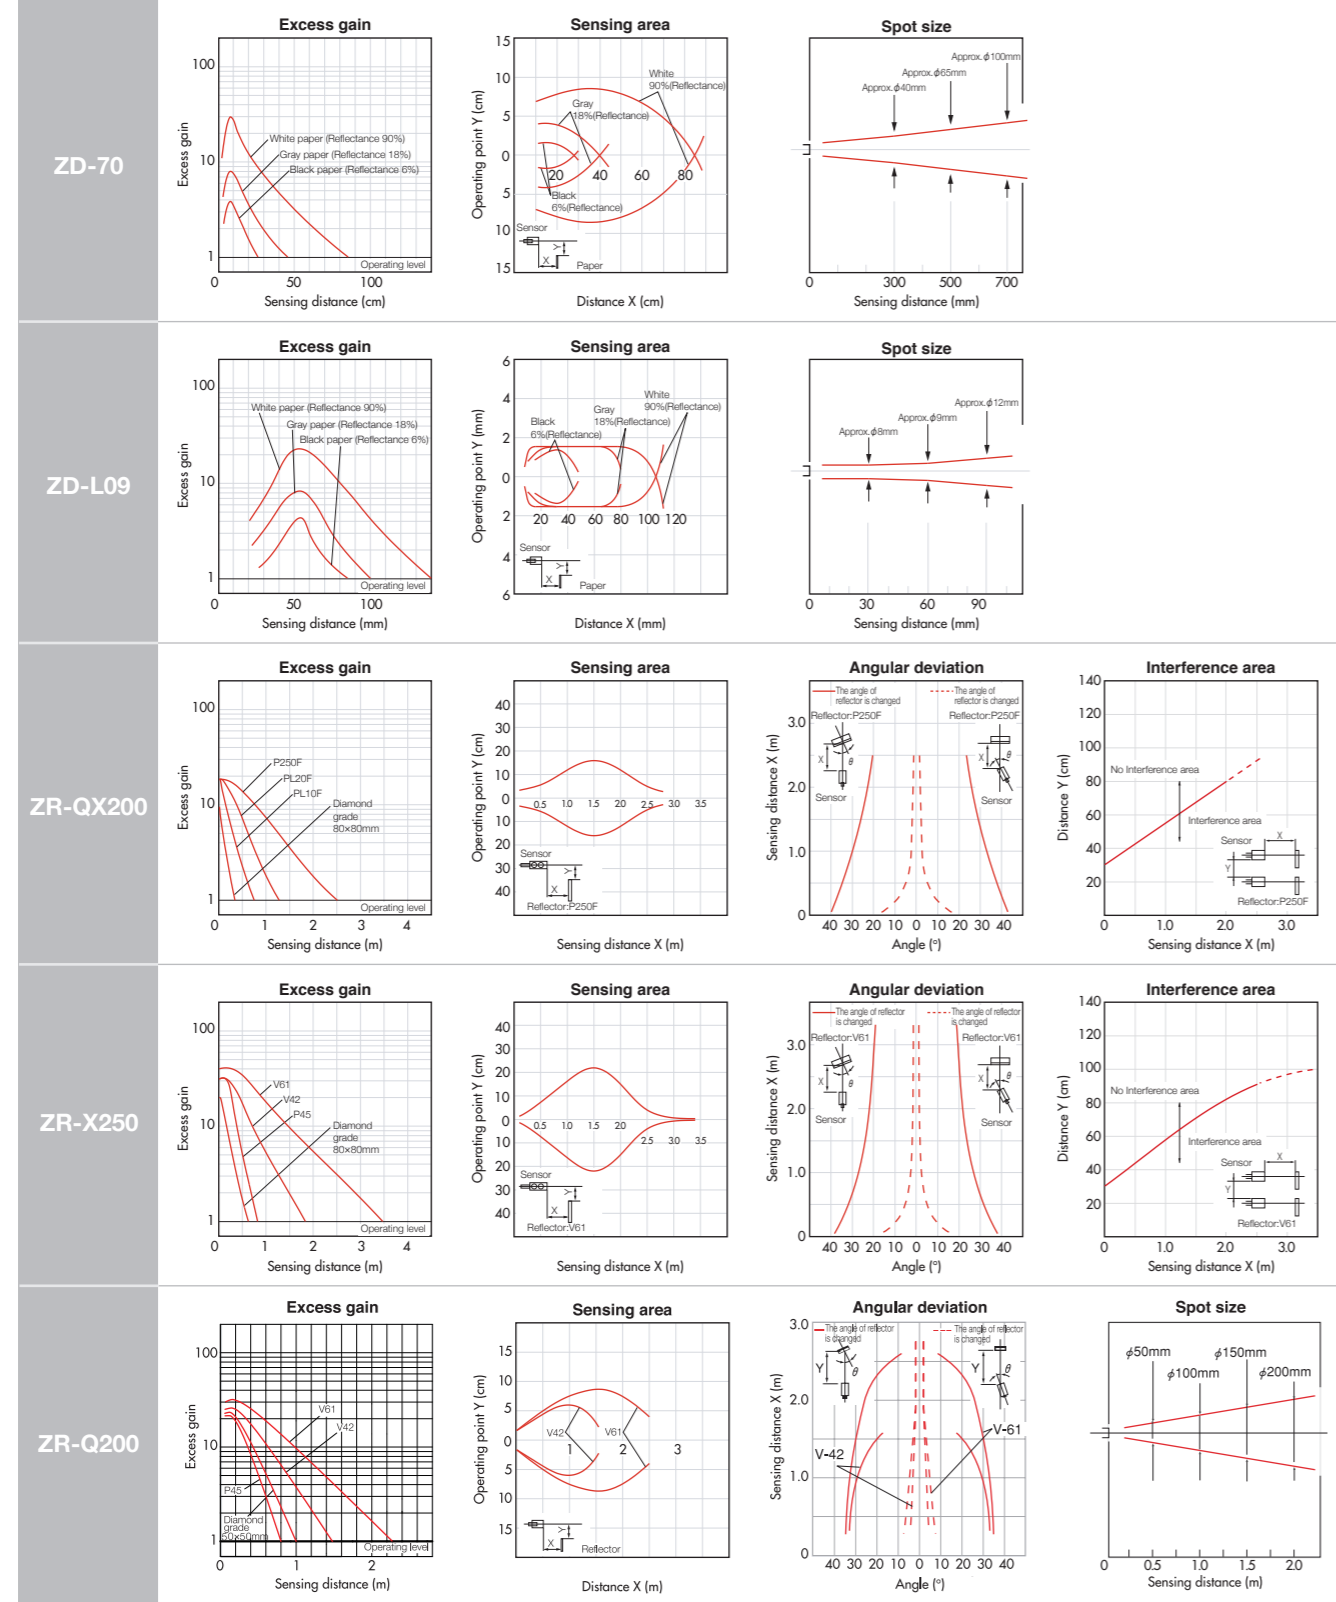

C
C2
E
J
J2
J3
V
V2
V3
V4
SR-Q
S
Z
BGS-Z
Z2
Z3
ZM
K
BGS-2S
Y
DM-18T
Accessory

Reference (typical)

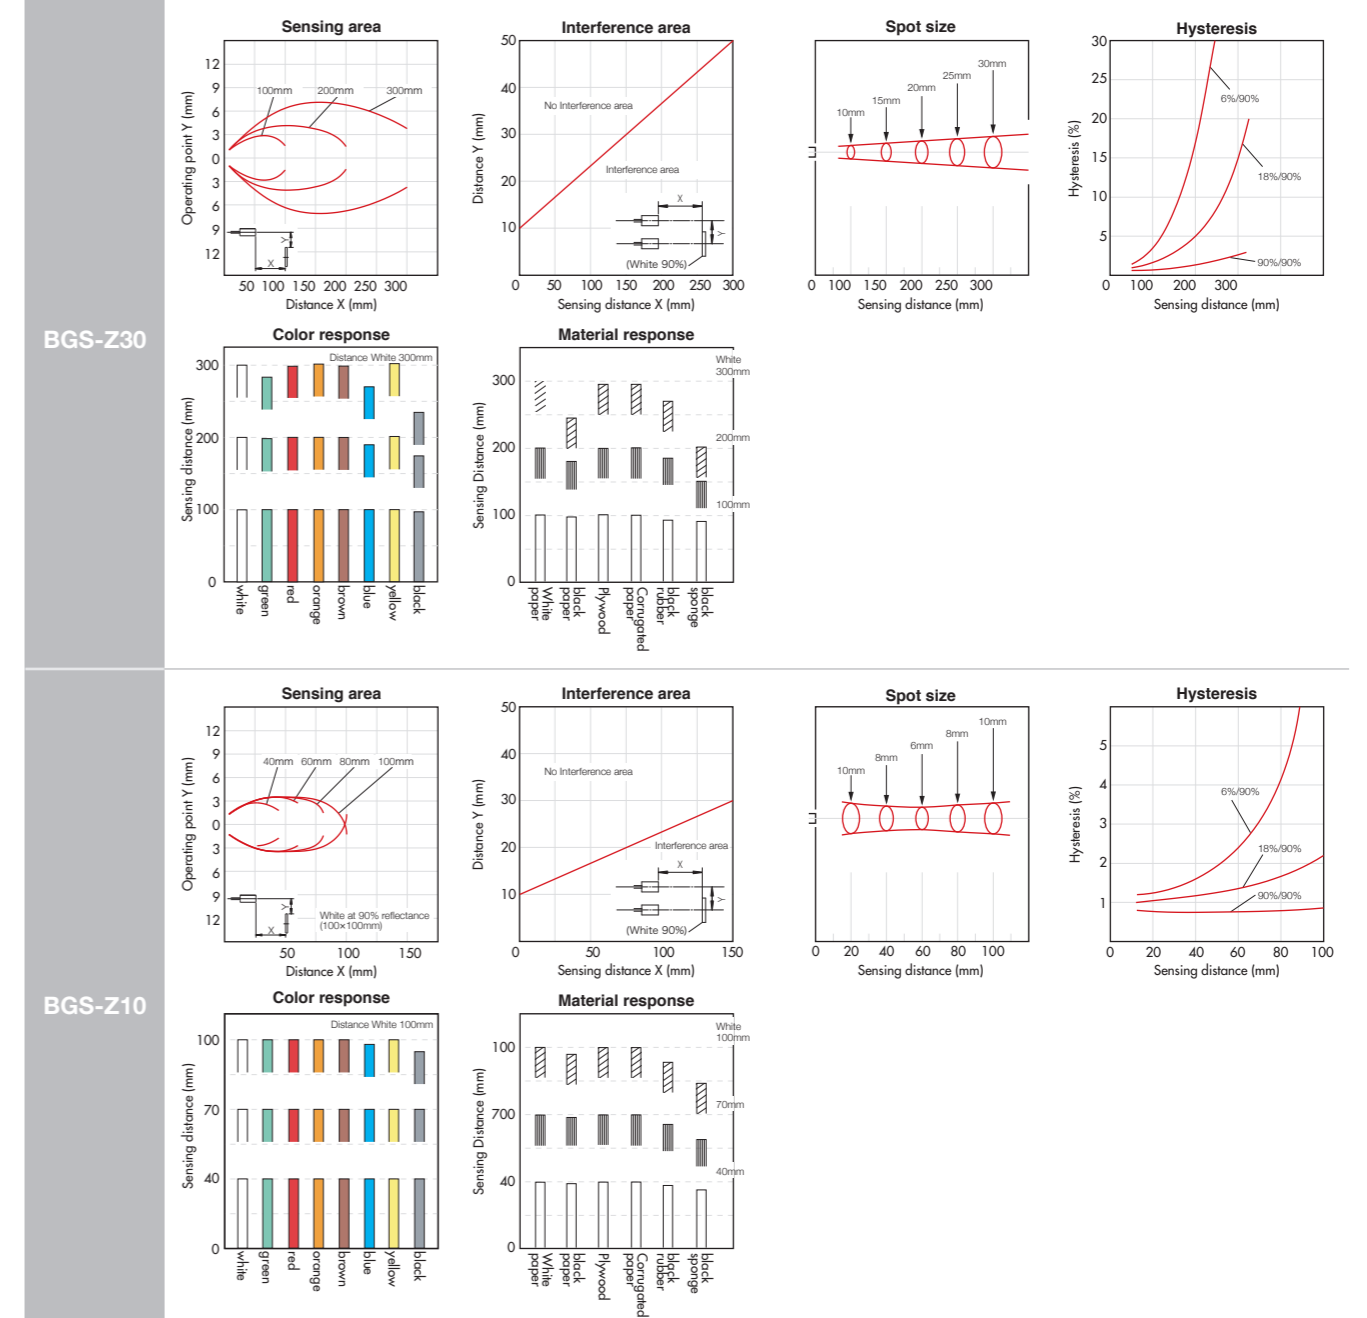

C
C2
E
J
J2
J3
V
V2
V3
V4
SR-Q
S
Z
BGS-Z
Z2
Z3
ZM
K
BGS-2S
Y
DM-18T
Accessory